



ARCHITECTURAL MEMBRANE

P E R F O R M A N C E
D R I V E N

E L E V A T I N G
A R C H I T E C T U R E



MATERIAL EXCELLENCE

PERFORMANCE IN EVERY LAYER

G R E A T E S T I N N O V A T I O N




FEATURES

-  UV PROTECTION
-  FLAME RESISTANCE
-  WEATHER RESISTANCE
-  FLEXIBLE STRUCTURAL
-  SUPERIOR TENSILE & TEAR STRENGTH
-  ARCHITECTURAL AESTHETICS
-  LOW MAINTENANCE
-  DURABILITY
-  WARRANTY
-  WATERPROOFING

WARRANTY

**Warranty duration and coverage vary by product series. Terms & conditions apply.*

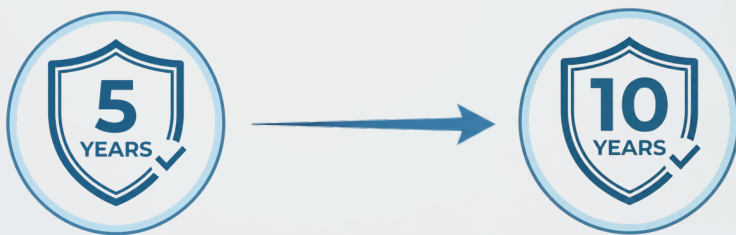

Up to 10 Year Limited Warranty
We stand by the durability and premium quality of our materials.

QUALITY ASSURANCE GUARANTEE
LONG-TERM PROTECTION

SHOWCASE GALLERY



WHY CHOOSE OKUJOU

JAPANESE TECHNOLOGY FOR PROTECTION

OKUJOU MEMBRANE menggunakan material premium yang disempurnakan dengan teknologi pelapisan ganda (Double-Sided) PVDF dari Jepang. Proteksi dua sisi ini memastikan ketahanan cuaca yang superior, kekuatan tarik tinggi, serta tampilan estetika yang terjaga sempurna.

Dirancang untuk durabilitas dengan masa pakai operasional yang panjang, **OKUJOU** memberikan perlindungan investasi terbaik melalui ketahanan sinar UV dan material heavy duty yang kokoh.



TECHNICAL DATA



PURE WHITE

BLOCKOUT

Standard

Unit

650 PURE WHITE

750 PURE WHITE

850 PURE WHITE

950 PURE WHITE

1050 PURE WHITE

750 BLOCKOUT

850 BLOCKOUT

MATERIAL COMPOSITION

Base Fabric						Polyester				
Coating						PVC Coated				
Lacquering						PVDF				

TECHNICAL SPECIFICATION

Weight	DIN EN ISO 2286-2	gsm	650	750	850	950	1050	750	850
Thickness	ISO 4593	mm	0.52	0.6	0.65	0.75	0.82	0.6	0.65
Adhesion	EN ISO 2411	N/5 cm	>100			>120		>100	
Translucency	SIJIA LAB STANDARD	%	4-10%					0%	

PERFORMANCE PROPERTIES

Flex Resistance	DIN 53359A	100,000					100,000			
Tear Resistance	DIN 53363	N/5 cm	300/250	350/300	500/450	550/500	350/300			
Temperature Resistance	DIN EN 1876-1	°C	-30°C-70°C							
Tensile Strength	EN ISO 1421	N/5 cm	2800/2500	3000/2800	4000/3500	4600/4500	3000/2800			
Flame Resistance	DINA 4102 EN13501	B1								
Light Fastness	ISO 4802-3-2006	>6								

PURE WHITE COLLECTION


OKU 650 GSM

OKU 750 GSM

OKU 950 GSM

B L O C K O U T C O L L E C T I O N

OKU 750 GSM




TEMP RESISTANCE



WARRANTY



WELDABLE PVDF



FLEXIBILITY

OKU 850 GSM

COLOR PALETTE COLLECTION

SINGLE TONE



TWO TONE





INNOVATION FOR MODERN ARCHITECTURE

RELIABLE ROOFING SOLUTIONS

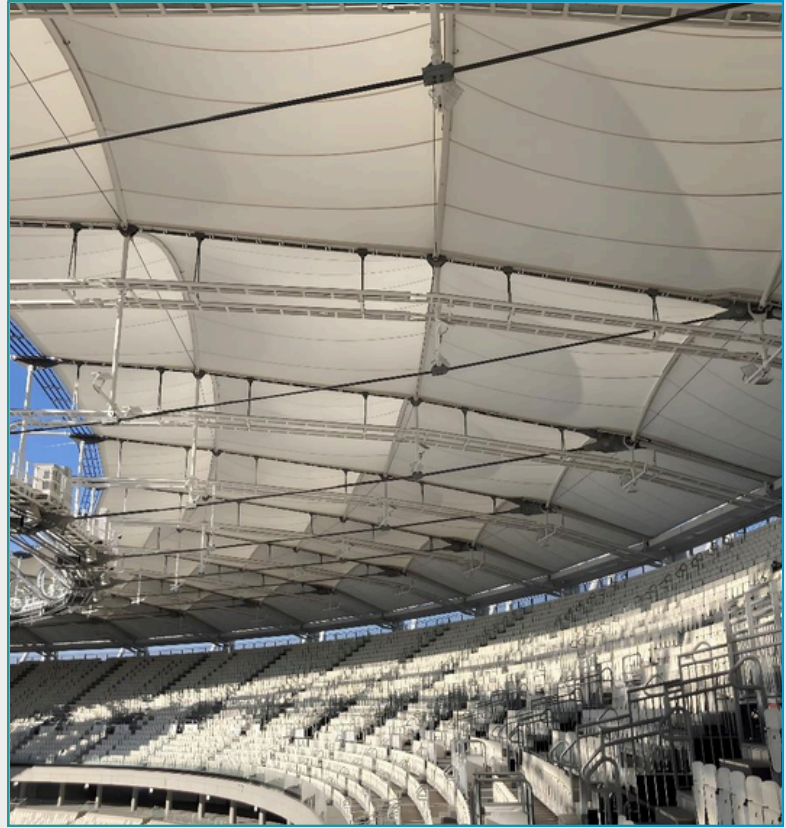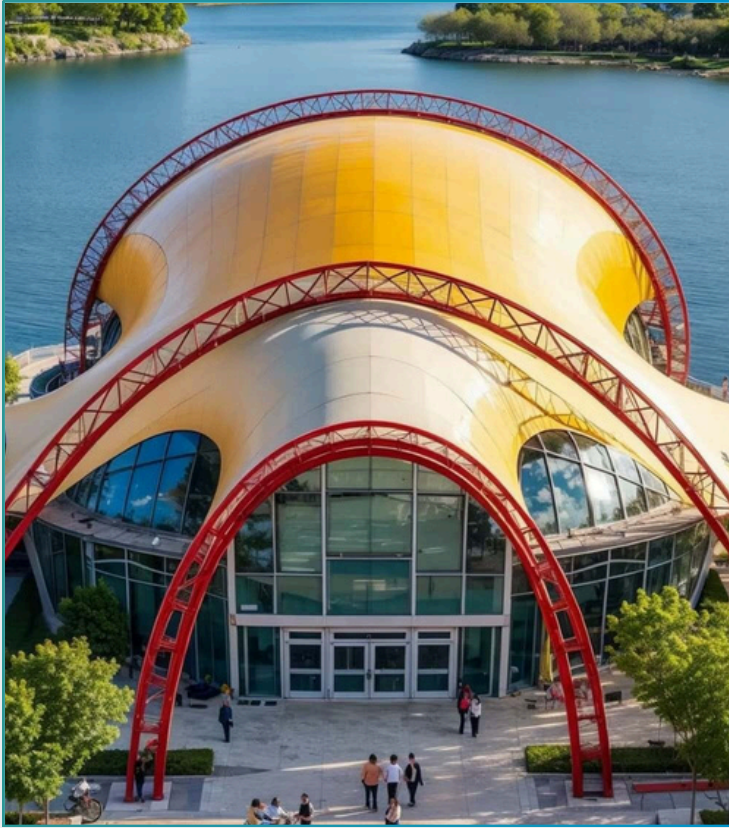

PT. DUTA MEMBRANE ASIA

Jl. Setro Timur No.40,
Gading, Tambaksari 60134,
Surabaya - Jawa Timur, Indonesia

✉ contact@okujou.id

🌐 www.okujou.id

